

ULMA



SUPER CHIK

Stretch Film



Tray Wrapping Machine



Super Chik



Automatic image centering device for printed film



Sealer cooler



Automatic infeed conveyor with tray centering device



A high performance wrapping machine, specially developed for the wrapping of trays in central processing facilities (meat, poultry, fish, produce, ...), and high volume supermarkets. A large range of models for customer requirements.


Its strength, reliability, ease of operation, and automatic size change, make it the most automatic size change, make it the most productive and versatile machine available, possibility to wrap with several kinds of film: PVC, polyethylene and polyolefines.

TECHNICAL FEATURES (Depends on the model)

- 1 or 2 film rolls with automatic roll selection.
- Automatic recognition of the tray dimensions or manual.
- Automatic or manual selection of film length and width.
- Universal elevator.
- Self diagnostic capability.
- Film tension control.
- Forward and reserve jog capability.
- 4-way film stretch with lateral pre stretch.
- Temperature control for the sealing belt.
- Over size package detector.
- Mechanical torque limiter.
- Guards and safety devices according to international standards.
- Heavy duty construction with corrosion resistant material. USDA approved.

OPTIONS

- Automatic infeed conveyor with tray centering device.
- Extended infeed conveyors.
- Centralized lubrication.
- Sanitary clean out tray.
- Gravity and motorized exit conveyors: in line, 90°, 180°, ...
- Additional 1 meter sealing device.
- Automatic image centering device for printed films.
- Printed band attachment.
- Transparent tray detection.
- Sealer Cooler.
- Others (Ask).

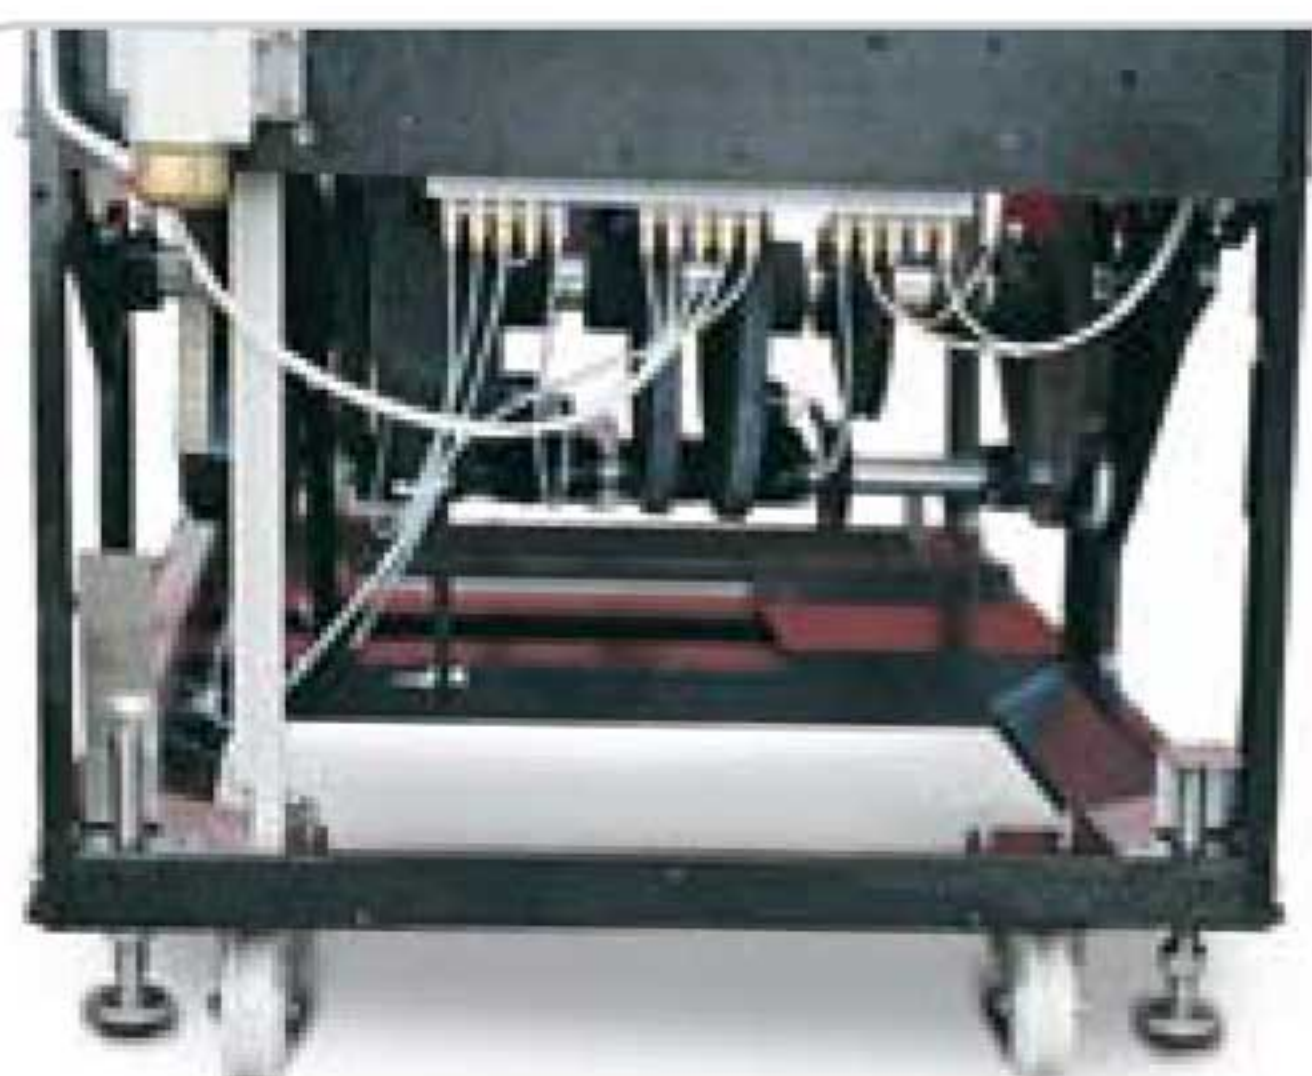


Lubrication



Gravity and Motorized Conveyors

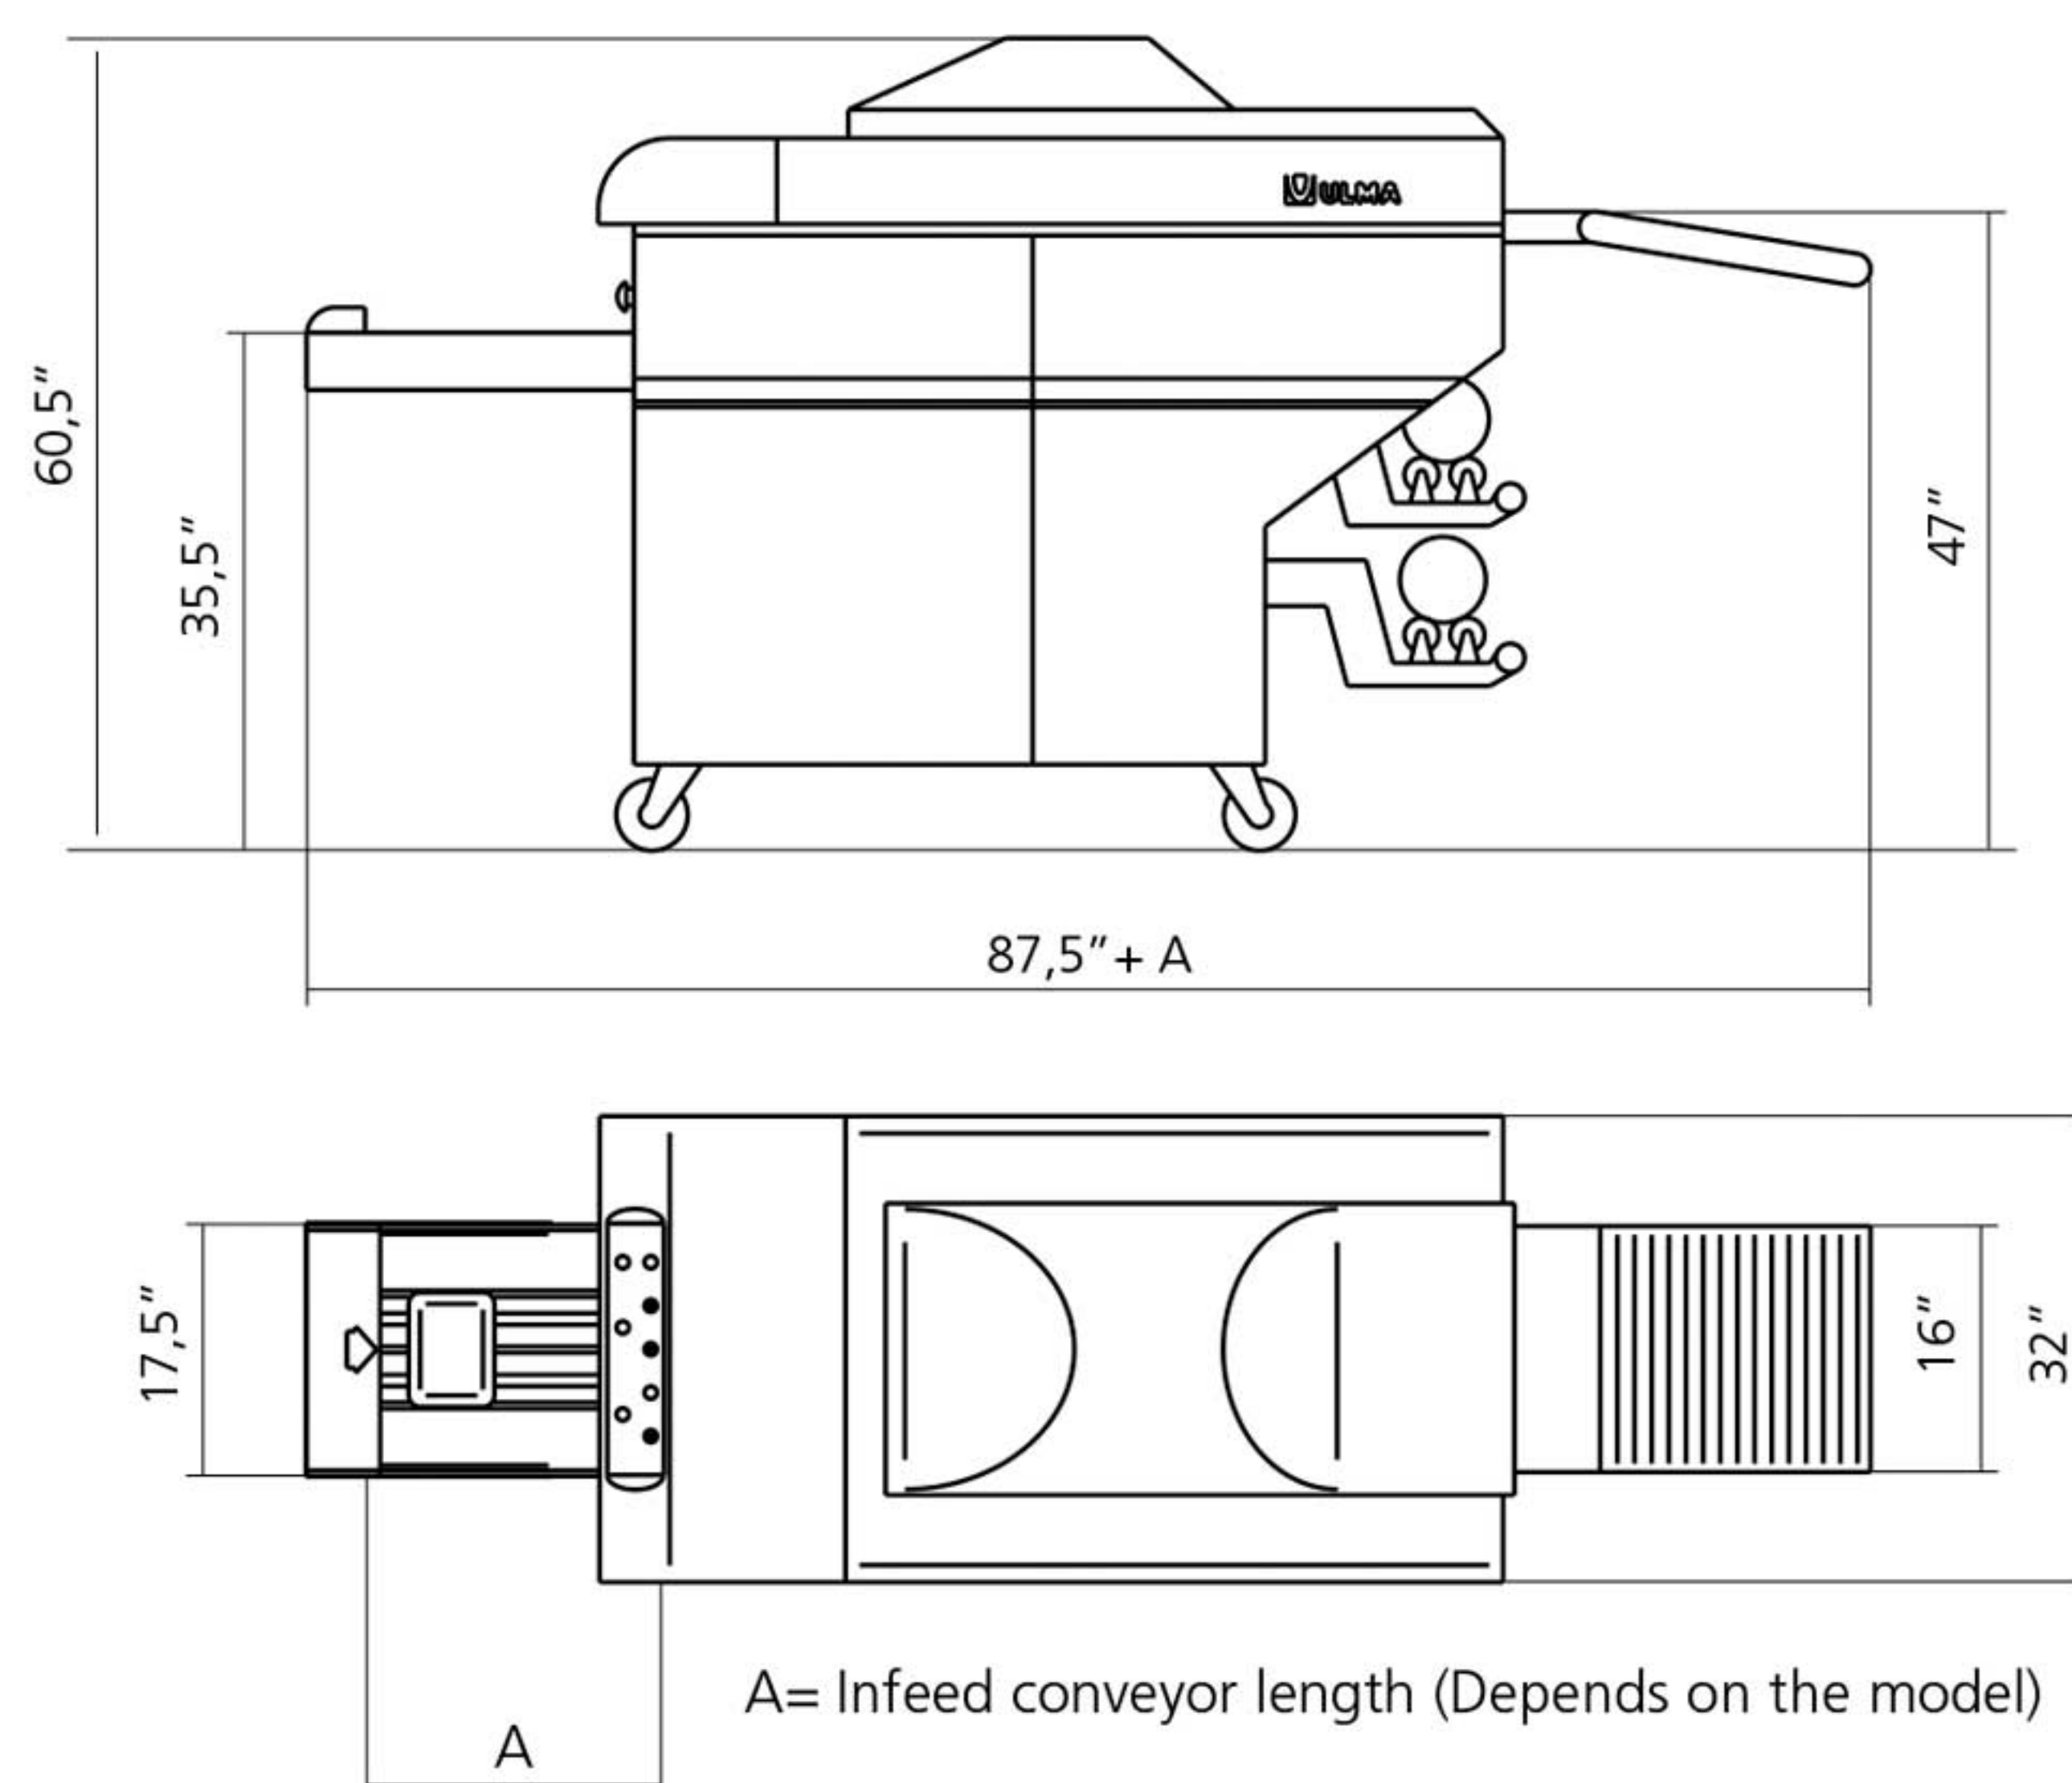


CHARACTERISTICS / MODEL

		Super Chik-30	Super Chik-35	Super Chik-45	Super Chik-60	Super Chik-A	Super Chik-BIG
Production	Speed (packs./min) Fixed / Variable	30 Fixed	35 Fixed	22 - 45 Variable	22-60 Variable	22-35 Variable	22-35 Variable
Size of the trays (Maximum and minimum incompatible)	Length	7"-14"				7"-10"	10"-15"
	Width	4"-9"				4"-7"	7"-10"
	Height	3/8"-7"				3/8"-7"	3/8"-7"- 6/8"
	Wrap without tray	NO				YES	NO
Tray size change		Manual	Automatic	Automatic	Manual	Semi Automatic (*)	Automatic
Roll of film	Maximum diameter	9"					
	Thickness	13-20 micras Depends on the film					
	Diameter of roll	3"-4,5"; With SSD film 6"					
	Width	14"-24" (Maximum and minimum incompatible)					
Type of Film	Nº of rolls	1	2	2	1	2	2
	PVC	S	S	S	S	S	S
	PE (Polyethylene)	O	O	O	O	O	O
	SSD (Polyolefine)	O	O	O	O	NO	NO
Printed Film		O	NO	O	NO	NO	NO
Electric power	Voltage	230/400V. 3 Phase +- 10% + N. + T. - 50/60 Hz.					
	Consumption	2,5Kw/6 Amp. -> 400V; 10 Amp.-> 230V					
Pneumatic consumption		Until 60 NL/Min a 6 bares (Ask to model of machine and options)					
Aproximate weight		1220 Lbs.					

(S= Standard; O= Option; Not possible= NO) (*) Lengths chosen by selector.

ULMA reserves the right to change specifications without prior notice.


ULMA Packaging

Thanks to 50 years' experience, we are a worldwide reference in the design and manufacturing of high-technology packaging equipment and systems.

50 years of progressing, innovating and perfecting our technology and services. A wide network at your service to offer you solutions all over the world and to give full satisfaction to anyone who places his trust in us.

For more information, please see our website:

www.ulmapackaging.com



DESCUBRE MÁS EN

www.taglermaq.cl